



F L O O R I N G



www.zinithsurfaces.com

SPC FLOORING



WOOD LOOK WORRY FREE

SPC wooden flooring is an innovative solution that combines the look of natural wood with the strength of stone plastic composite. Its rigid core layer, made of limestone and stabilizers, ensures high durability and resistance to impact. Unlike traditional wood, SPC flooring doesn't expand or contract with temperature changes, making it perfect for areas with fluctuating climates or high foot traffic.

One of the standout features of SPC flooring is its 100% waterproof nature. This makes it ideal for moisture-prone areas like kitchens, bathrooms, and basements. Its multi-layer construction also offers excellent sound insulation and underfoot comfort. With a click-lock system, installation is hassle-free and doesn't require glue or nails, which makes it a popular choice for both DIYers and professionals.

Aesthetically, SPC wooden flooring comes in a variety of finishes, closely mimicking the natural textures and grains of real wood. Whether you prefer rustic oak or sleek walnut tones, there's a style to match every interior. Its low maintenance and scratch-resistant surface make it an excellent long-term investment for both residential and commercial spaces.

ROOTED IN NATURAL STRENGTH

SPC wooden flooring offers the perfect blend of natural wood aesthetics and modern engineering. With a stone-plastic core, it delivers unmatched durability, water resistance, and stability. Its real-wood look enhances any interior, from cozy homes to busy offices. Easy to install and maintain, SPC flooring is a smart, stylish choice rooted in the lasting strength of nature.


www.zinithsurfaces.com

 **ZINITH**
SURFACES



WOOD INSPIRED SPC FLOORING

Inspired by nature and specially designed for residential and commercial applications, you will find our floors beautifully realistic and highly practical. Offering wide and impressive range of designs, finish and install formats, you can create a floor that is unique to your home and guaranteed to leave long lasting impression for years to come.

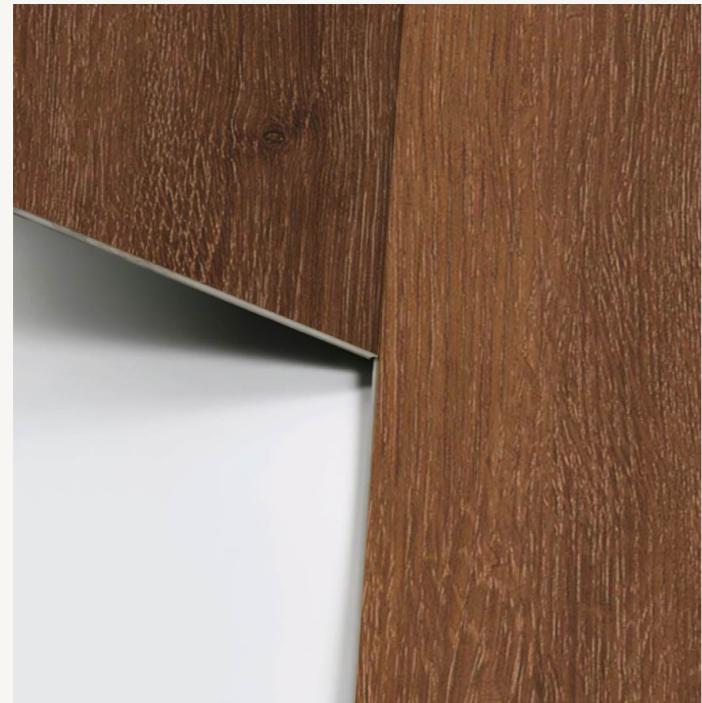

CLICK LOCK TECHNOLOGY

Our Click Lock Technology comes with the Glueless Locking for Flooring, this works perfectly for both the long and short sides of the flooring panel and ensures there are no unwanted gaps or spaces between floorboards.



Thickness (5 mm)



AVAILABLE
SIZES

LAYER STRUCTURE

The Multi layer design and unique construction covering UV coating, wear layer, color layer, and stiff SPC core with foam backing make it durable, scratch and stain resistance. The product specifications for our SPC Click Lock are intended to service a variety of applications, including both domestic and





FEATURES OF SPC FLOORING

Experience unmatched comfort and quietness as our SPC Flooring is designed to reduce noise, creating a peaceful ambiance in your home. Along with that, It has many qualities like being water proof, low maintenance, kid-friendly, family friendly, and quick to install.



Patented interlock
system for
easy installation



Real to
touch texture



No Termite
No Bugs



Excellent
Acoustic



Low
Maintenance



High
Dimensional
Stability



Scratch &
Stain
Resistant



Easy
to Clean



Fire
Retardant



100%
waterproof

www.zinthsurfaces.com

 **ZINITH**
SURFACES

TABLE OF CONTENT

Browse our SPC flooring tile collection, showcasing a variety of styles, colors, textures, and sizes. Easily find the perfect match for any residential or commercial space.

AVAILABLE SIZES

181X
1220MM



www.zinithsurfaces.com

CREEK
OAK

PINE OAK
DARK

KANSAS
TEAK

BOSTON
GREY

CHEROKEE
OAK

SYCAMORE
TEAK



CREEK OAK

Total Thickness

5mm

Available Sizes

181X
1220MM




Straight
Random



Herringbone
Only Available in
155x914mm

Click Tile

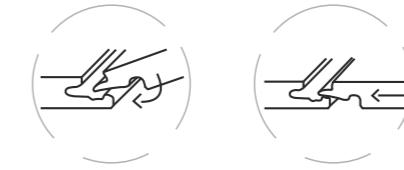

Easy & Hassle Free
Instalation





CREEK
OAK



PINE OAK DARK

Total Thickness

5mm

Available Sizes

181X
1220MM




Straight
Random




Herringbone
Only Available in
155x914mm

Click Tile

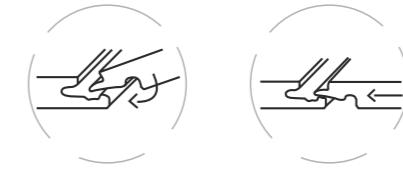

Easy & Hassle Free
Instalation

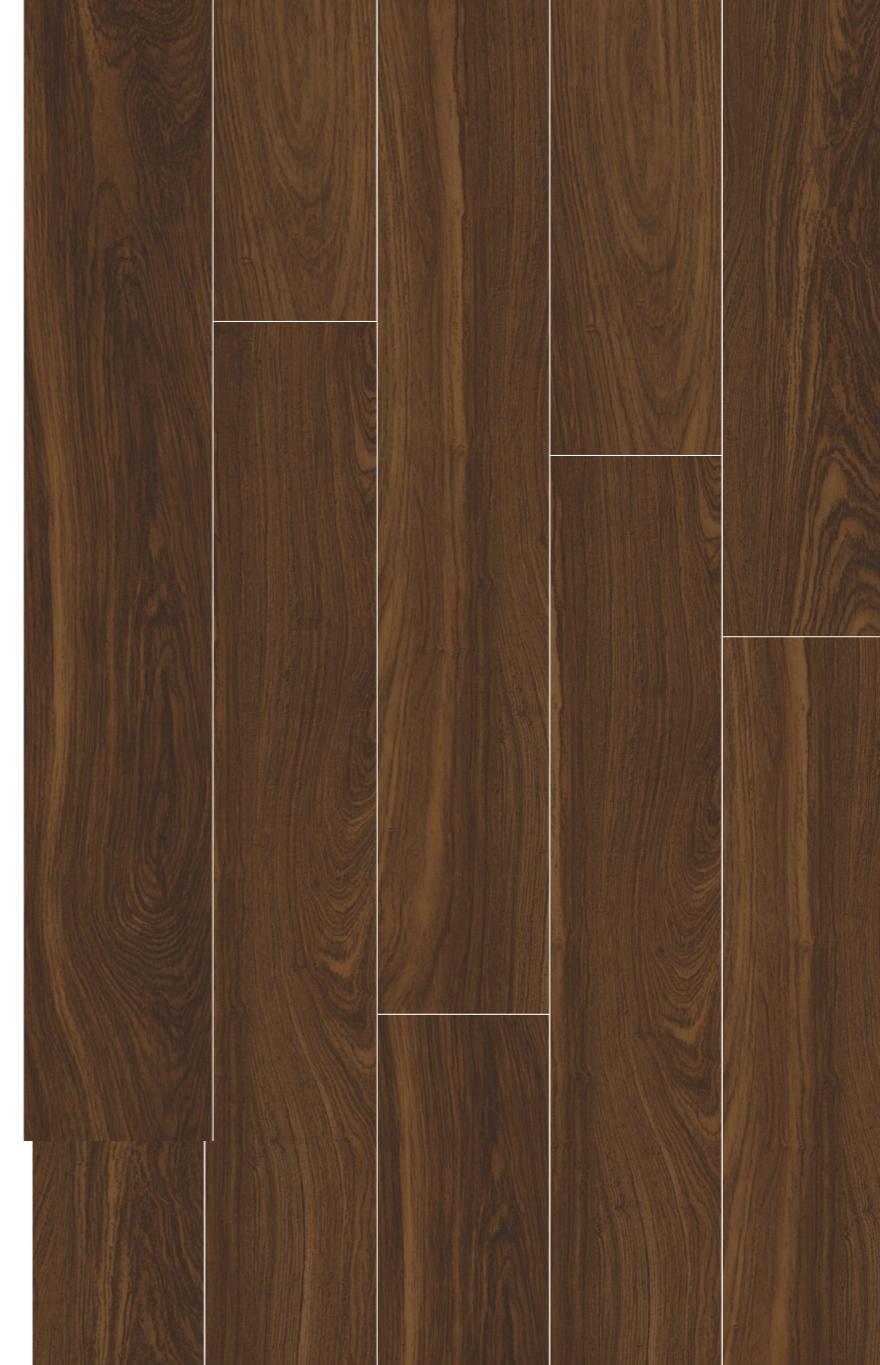

www.zinthsurfaces.com



**PINE
OAK DARK**



KANSAS TEAK

Total Thickness

5mm

Available Sizes

181X
1220MM




Straight
Random



Herringbone
Only Available in
155x914mm

Click Tile

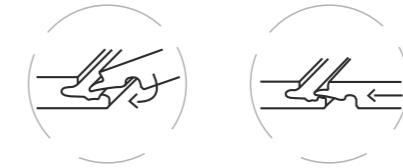

Easy & Hassle Free
Instalation





KANSAS
TEAK



BOSTON
GREY

Total Thickness

5mm

Available Sizes

181X
1220MM




Straight
Random



Herringbone
Only Available in
155x914mm

Click Tile

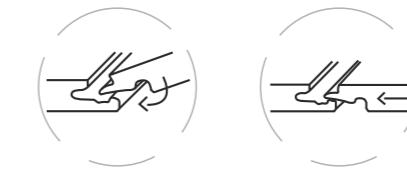

Easy & Hassle Free
Instalation





**BOSTON
GREY**



CHEROKEE OAK

Total Thickness

5mm

Available Sizes

181X
1220MM




Straight
Random



Herringbone
Only Available in
155x914mm

Click Tile

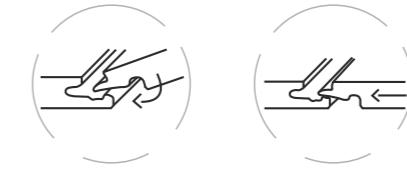

Easy & Hassle Free
Instalation



www.zinthsurfaces.com



CHAROKEE
OAK



SYCAMORE TEAK

Total Thickness

5mm

Available Sizes

181X
1220MM




Straight
Random



Herringbone
Only Available in
155x914mm

Click Tile

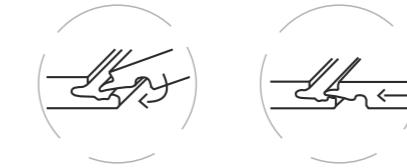

Easy & Hassle Free
Instalation





**SYCAMORE
TEAK**

TECHNICAL DATA

SYMBOL	PARAMETER	TEST STANDARD	SPECIFICATION / CRITERIA	RESULT
	Dimensional Stability	ISO 23999	< 0.10 mm	PASS
	Curling	ISO 23999	< 1 mm	PASS
	Micro scratch resistant	EN 16094	> 25000 Cycle(4N Load), <A2	PASS
	Residual Indentation	ACTME 1914	< 0.10 mm	PASS
	Shore D hardness	ASTM D 2240	> 15 to < 70 HD	PASS
	Scratch Resistance	—	> 6 N	PASS
	Abrasion Resistance	EN 13329	AC4 (> 4000 cycle)	PASS
	Pill strength	EN 24345	> 50 N / 50 mm	PASS
	Locking Strength	ISO 24334	> 250 N / 100 mm	PASS
	Density	ASTM D 792	1.95 TO 2.05 g/cm³	PASS
	Dimensional Variation After change in Relative humidity	EN 13329:2016	Long side <0.9mm Short side <0.9mm	PASS
	Large Ball Impact test	EN 438	1600 mm Height (320 gm load)	PASS





info@zinihsurfaces.com
www.zinihsurfaces.com